


12V DC	F77-12L8204/HT-44S	Suction-Aspirante
------------------	---------------------------	-------------------

Test Voltage: **13,0 VOLT DC**

Static Pressure		SUCTION Aspirante				BLOWING Soffiante			
Pa	IN H2O	Airflow m ³ /h	Airflow cfm/h	Current A	Eff. %	Airflow m ³ /h	Airflow cfm/h	Current A	Eff. %
0	0	3390	2000	16,3	0,0				
25	0,1	3190	1880	17,1	10,0				
50	0,2	2970	1750	17,7	17,9				
75	0,3	2770	1630	18,4	24,1				
100	0,4	2540	1500	19,0	28,6				
125	0,5	2300	1360	19,2	32,0				
150	0,6	1970	1160	19,3	32,7				
175	0,7	1620	960	19,4	31,2				
200	0,8	1190	700	19,9	25,6				
225	0,9	820	480	20,4	19,3				
250	1,0	500	300	20,9	12,8				
300	1,2	0	0	23,1	0,0				


Part No: Sucking: FAN0742HP

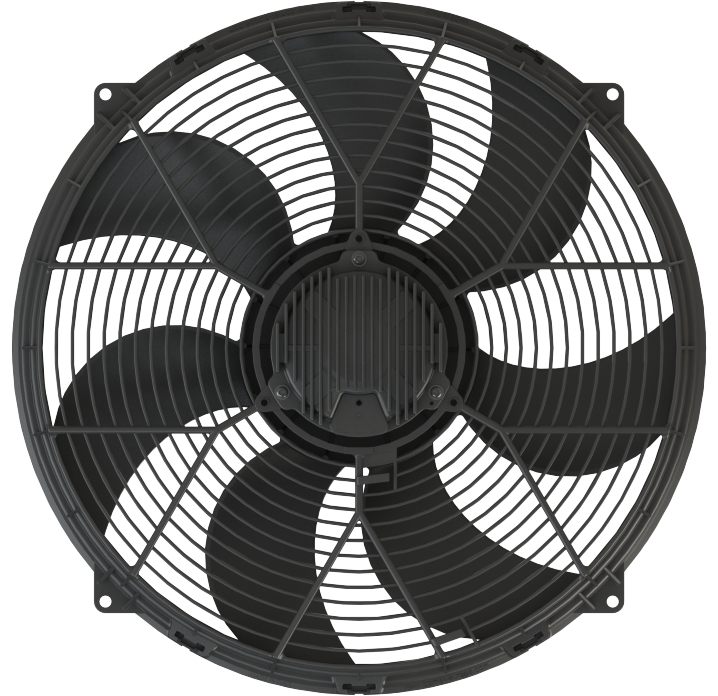

ErP 2015 (2011/327/EC)

RENDIMENTO - EFFICIENCY

type	Pa	m3/h	A	kW	rpm	EFF.	r
Suction	150	1970	19,3	0,25	2230	32,7%	1,0016
Blowing							

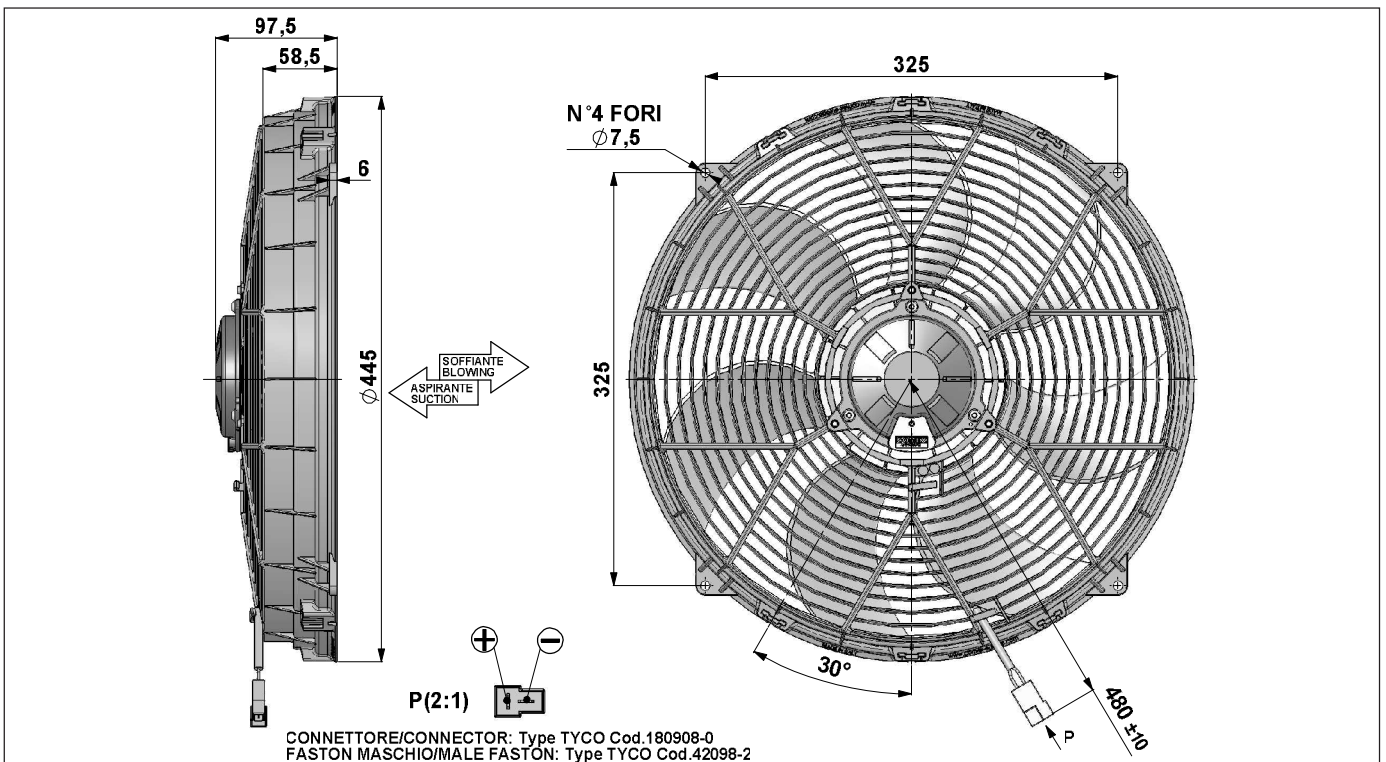

Weight: 3,1 Kg	Noise: LOW NOISE
Pressure rate: 1Pa = 0,004 inch H2O	Static Pressure: pascal (Pa)
Dimensions rate: 25,4 mm = 1 inch	Airflow rate: 1 m ³ /h = 0,59 cfm/h